


2.2. Techniques of Construction

Materials used in the construction of furniture frames can change according to the style of furniture. The aim of the furniture frame is carrying the element of upholstery but also predisposing to upholstery and to provide a comfortable sitting area

Furniture frames are generally used as a bottom prop material. In the construction of this is paid attention to style and form. Because of furniture frames is related to comfort sitting, measurement is important in the stage of construction.

During the stage, the combination place of furniture frame can be made with joint of opened angle mortising and notching. If sitting furniture is made inclined style, furniture frame also requires the same incline. In serial manufactory joint of opened angle mortising is generally used. The simplest one is indenting. The thickness of frames shouldn't be weak and prepared from perfect trees. Furniture frame prepared from weak and defective trees do not carry the load and break. Furniture frames can be searched in two ways.

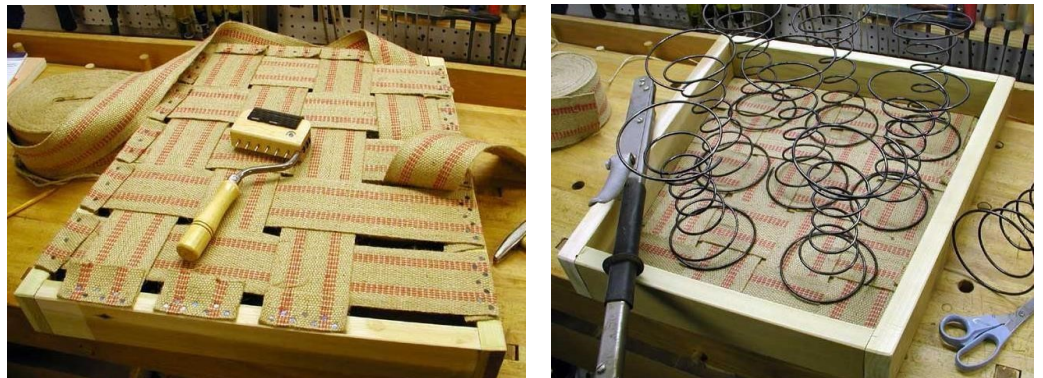

Picture 3.4: Furniture frames hammered colon and tied arch